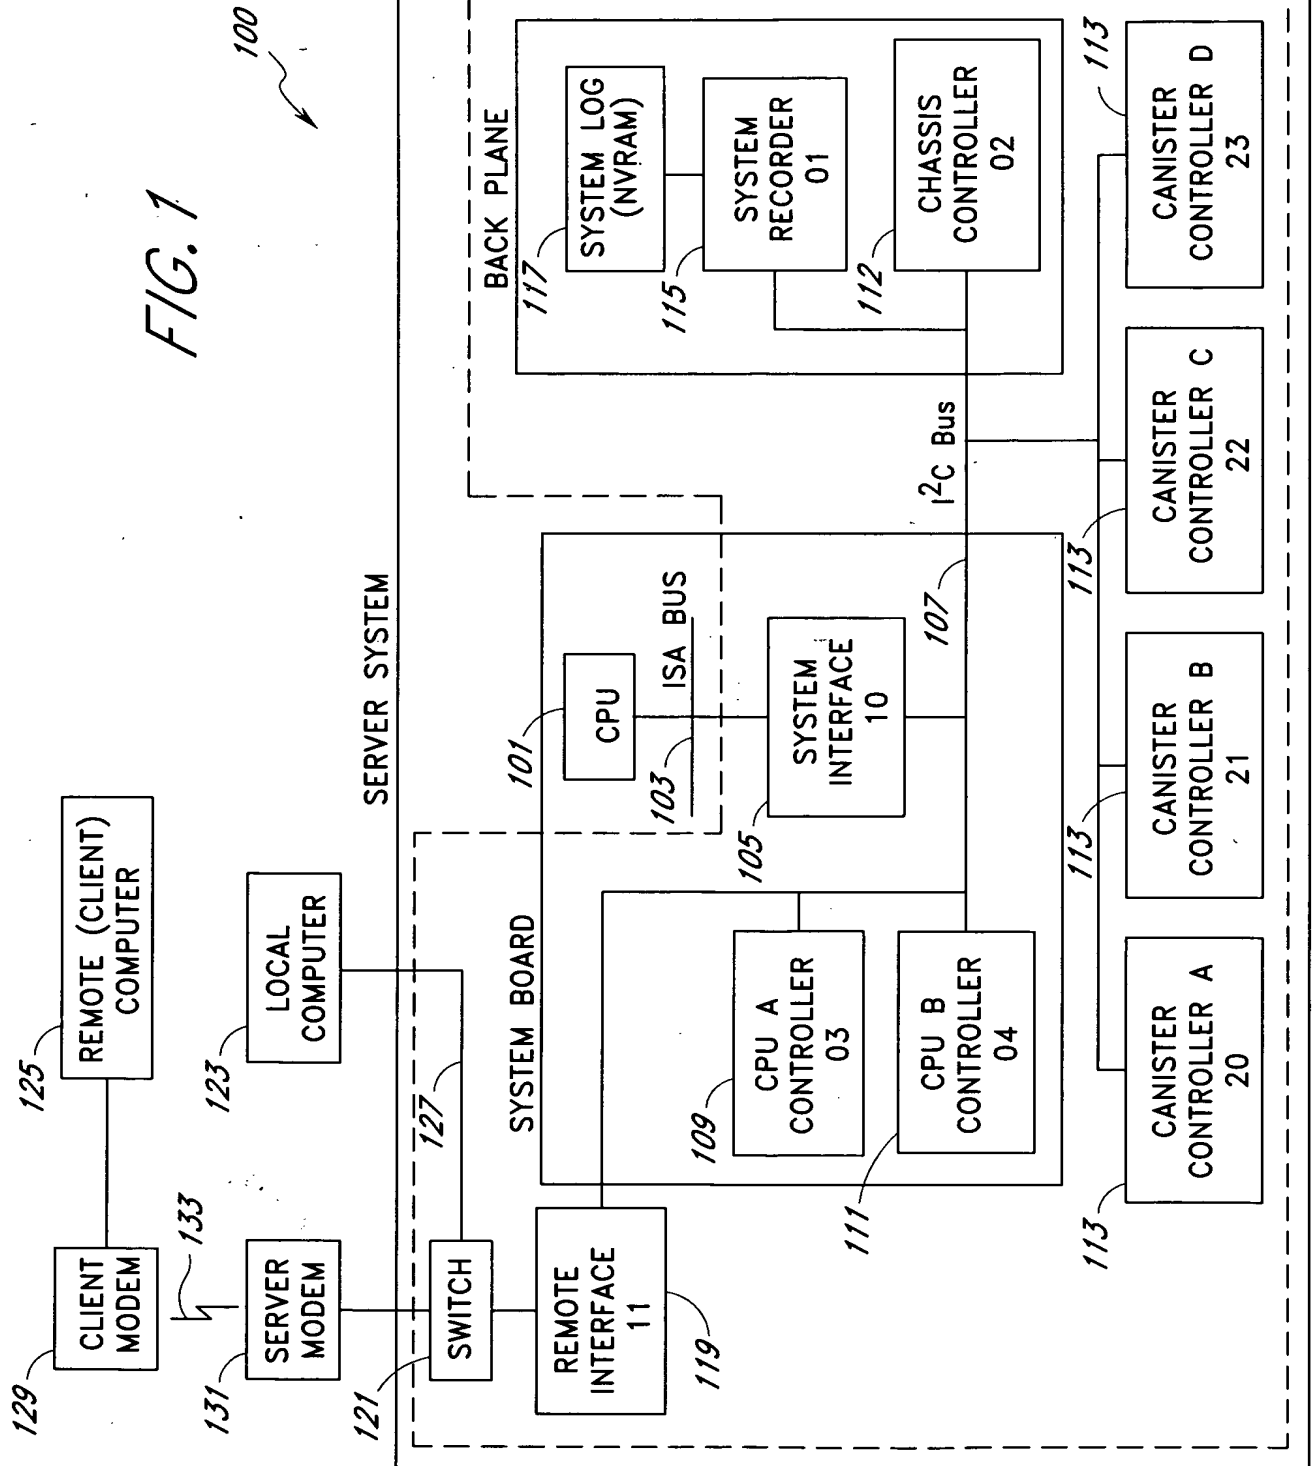


6243838



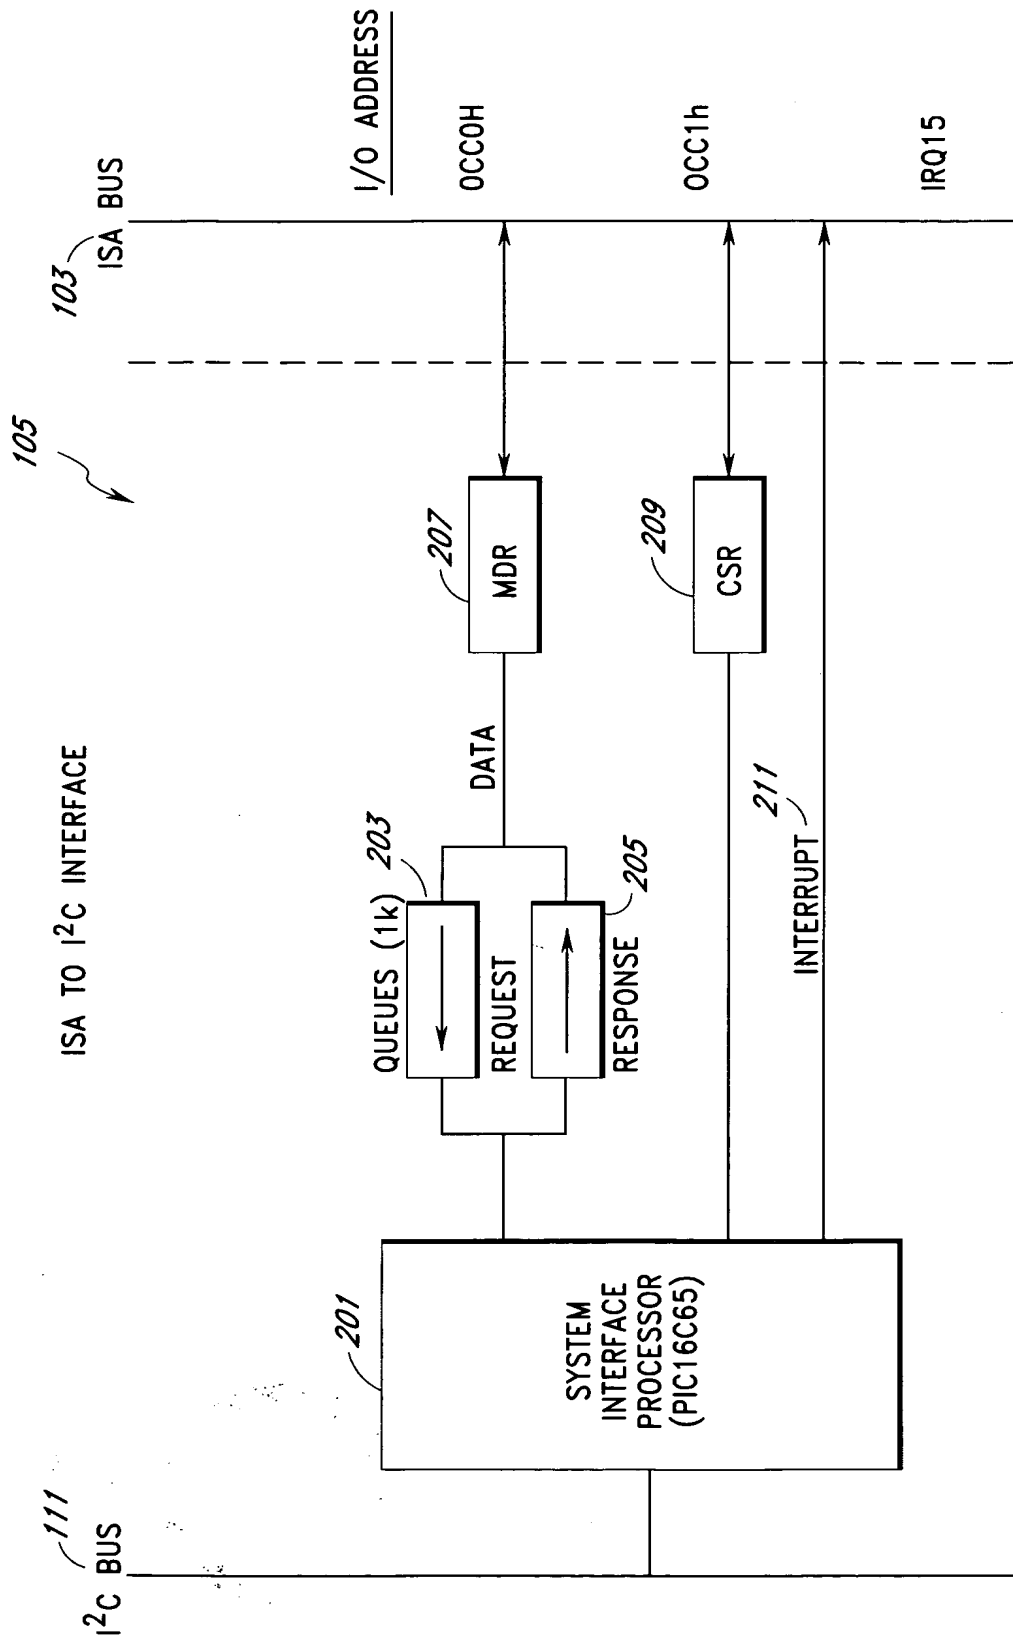


FIG.2

READ REQUEST FORMAT

Offset

Byte 0	Slave Addr (7 Bytes)	0 LSBit
Byte 1	MSBit (1)	Type
Byte 2	Command ID (LSB)	
Byte 3	Command ID (MSB)	
Byte 4	Read Request Length (N)	
Byte 5	Check Sum	

FIG. 3A

WRITE REQUEST FORMAT

Offset

Byte 0	Slave Addr (7 Bytes)	0 LSBit
Byte 1	MSBit (0)	Type
Byte 2	Command ID (LSB)	
Byte 3	Command ID (MSB)	
Byte 4	Write Request Length (N)	
Byte 5	Data Byte 1	
⋮	⋮	
Byte N+4	Data Byte N	
Byte N+5	Check Sum	

FIG. 3B

READ RESPONSE FORMAT

Offset

Byte 0	Slave Addr (7 Bytes)	1 LSBit
Byte 1	Read Request Length (N)	
Byte 2	Data Byte 1	
⋮	⋮	
Byte N+1	Data Byte N	
Byte N+2	Status	
Byte N+3	Check Sum	
Byte N+4	Inverted Slave Addr	

FIG. 3C

WRITE REQUEST FORMAT

Offset

Byte 0	Slave Addr (7 Bytes)	1 LSBit
Byte 1	Write Response Length (N)	
Byte 2	Status	
Byte 3	Check Sum	
Byte 4	Inverted Slave Addr	

FIG. 3D

APPROVED	O.G. FIG.
BY	CLASS SUBCL. 3
DRAFTSMAN	714 57

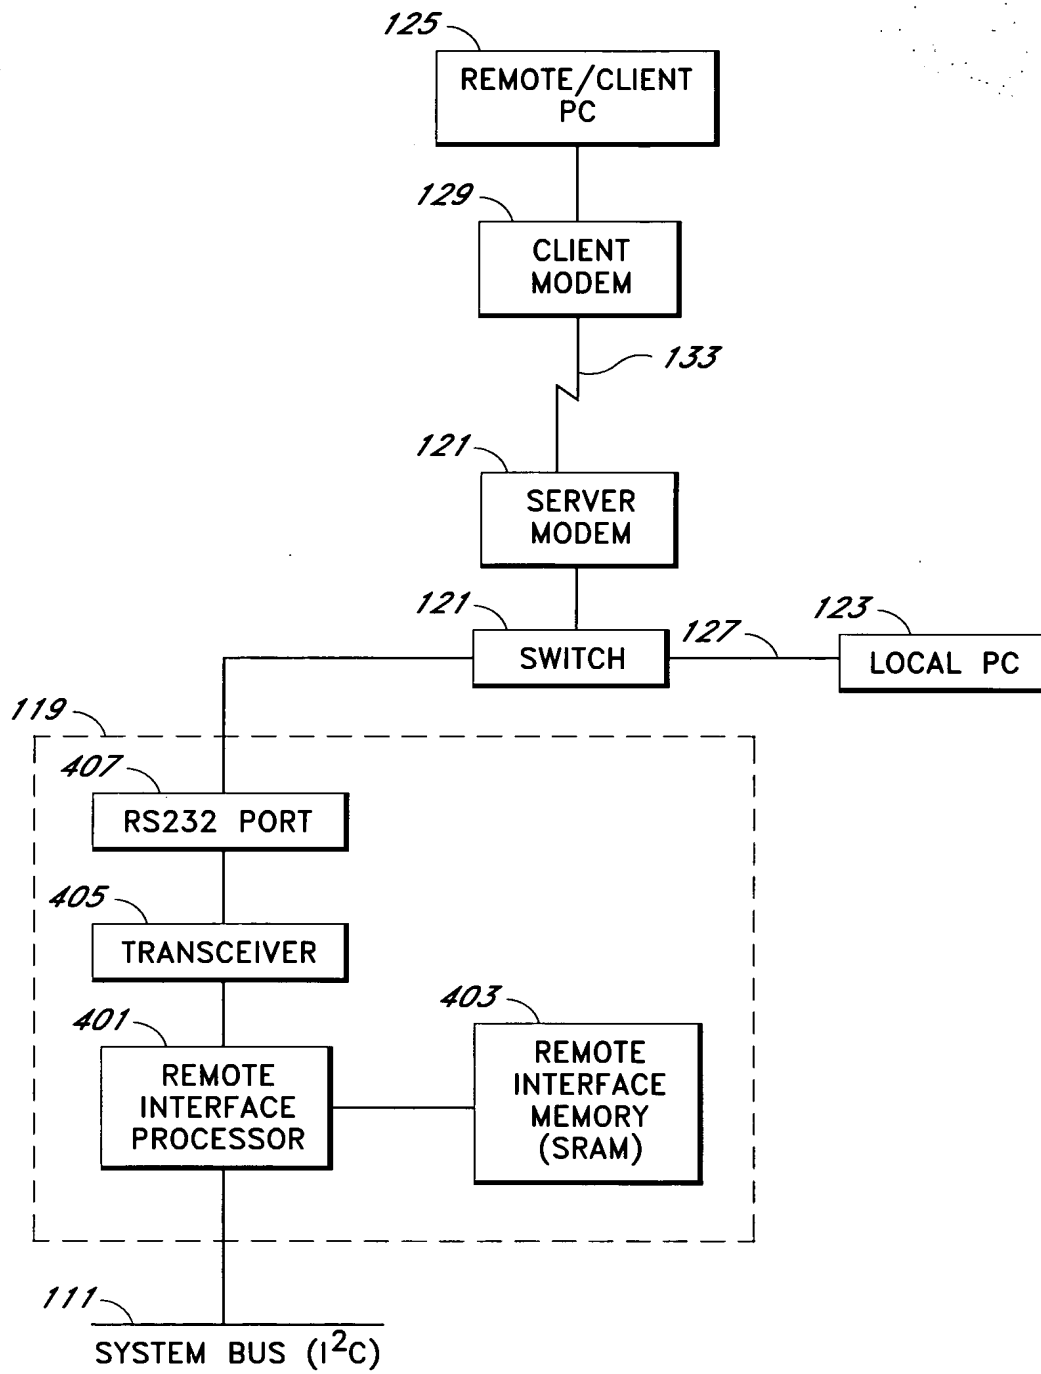


FIG. 4

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN	714	57

REMOTE INTERFACE SERIAL PROTOCOL MESSAGE FORMATS

Request:

SOM	Seq. #	TYPE	Data	...	Check	EOM
-----	--------	------	------	-----	-------	-----

FIG. 5A

Response

SOM	Seq. #	STATUS	Data	...	Check	EOM
-----	--------	--------	------	-----	-------	-----

FIG. 5B

Event Interrupt

INT

FIG. 5C

APPROVED	D.G. PG.
BY	CLASS SUBCL/ES
DRAFTSMAN	714 57

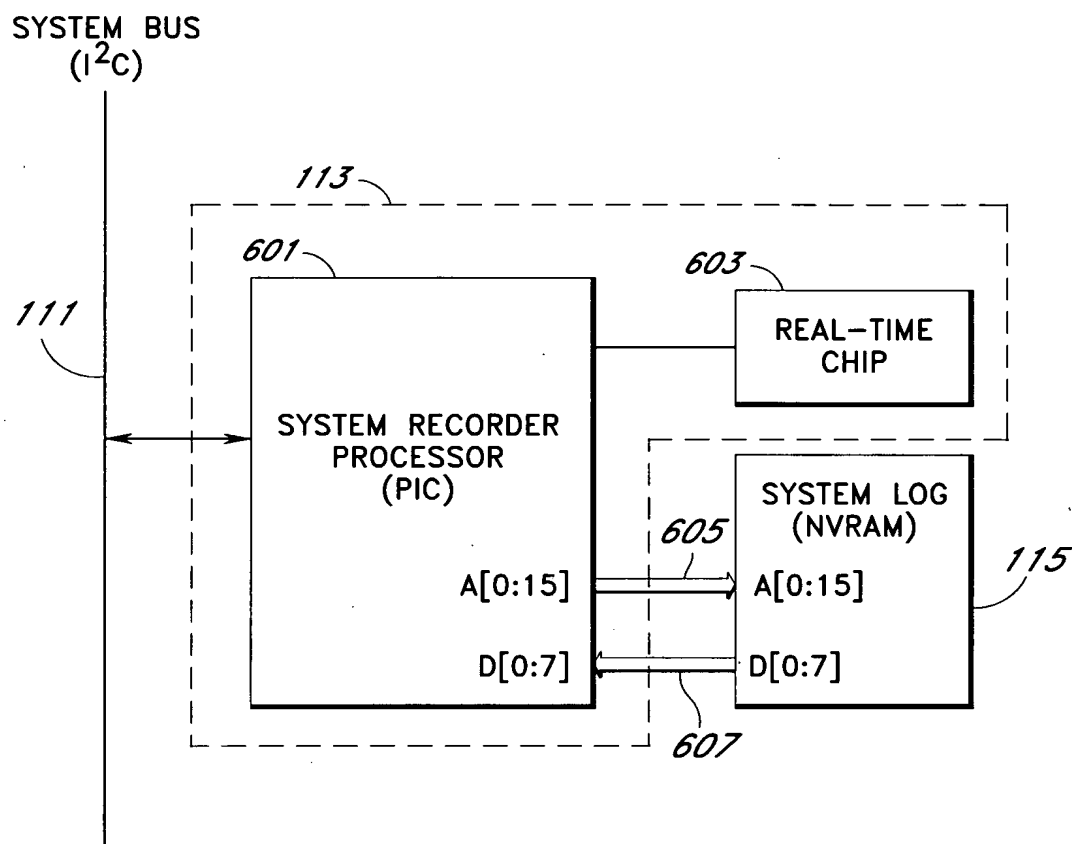


FIG. 6

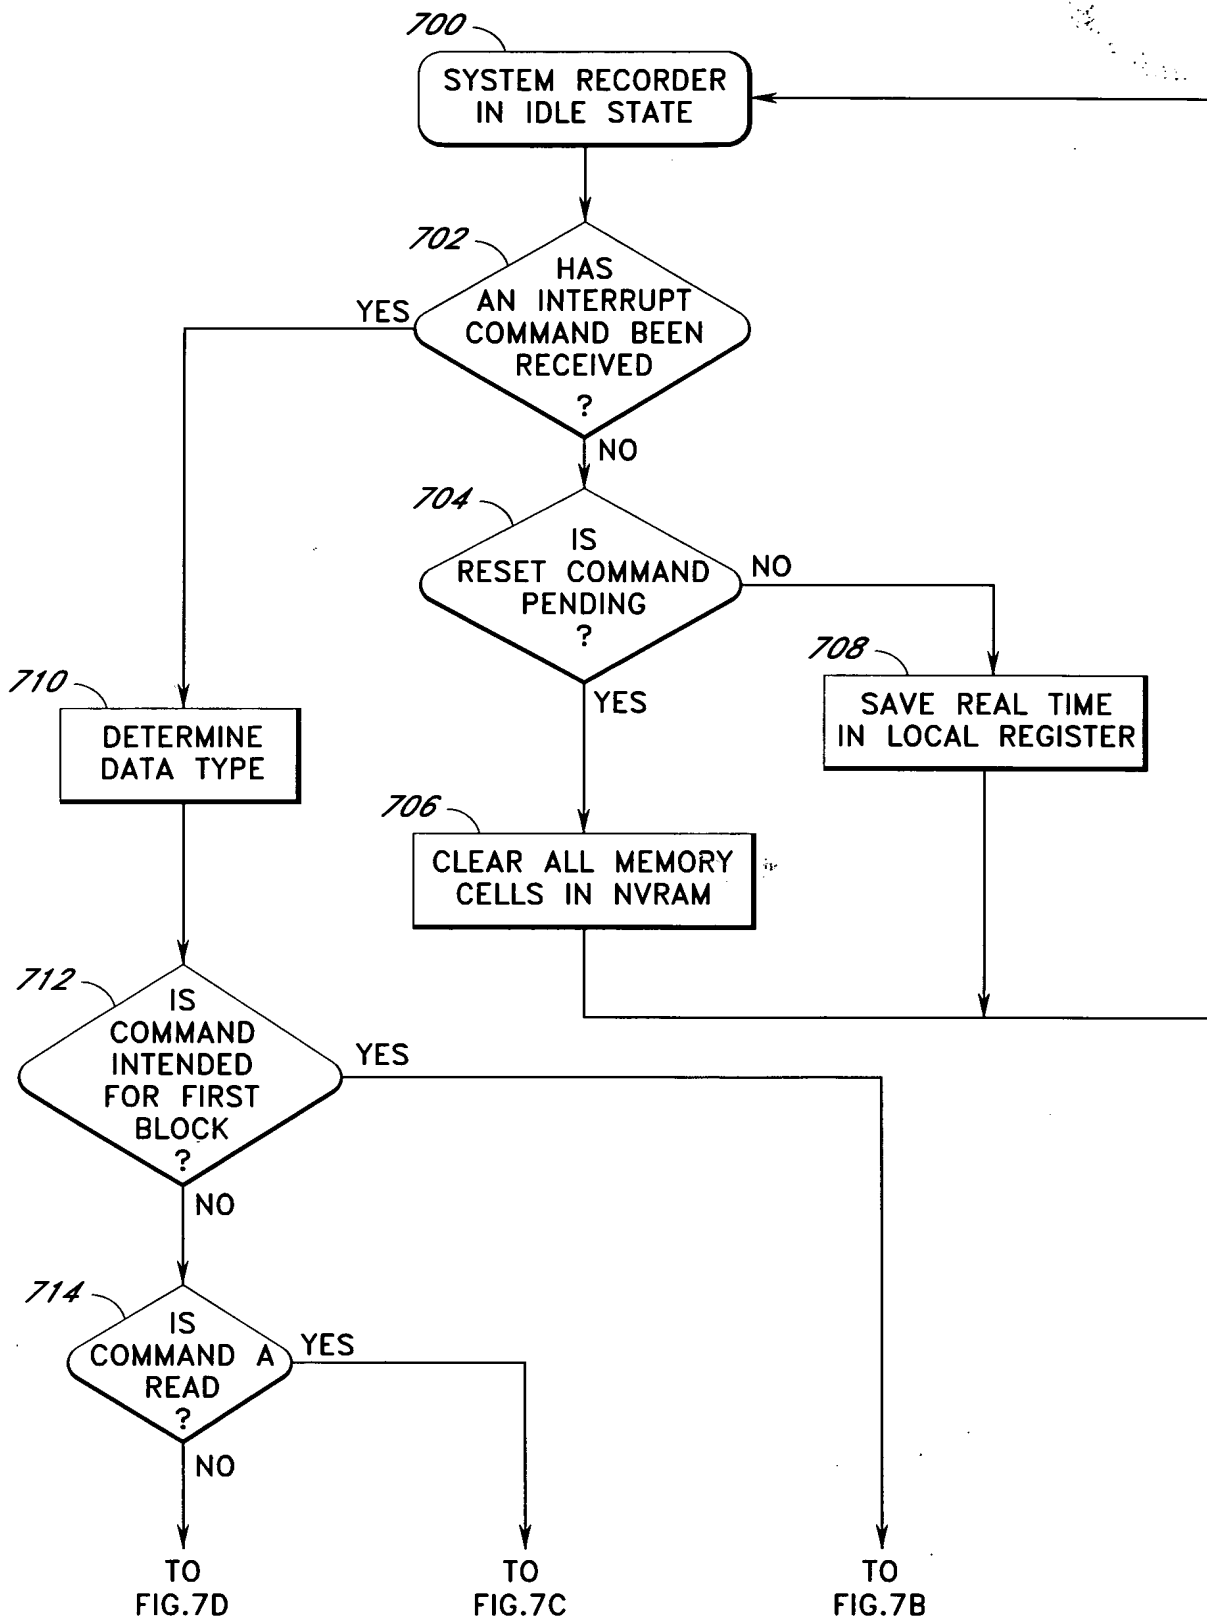


FIG. 7A

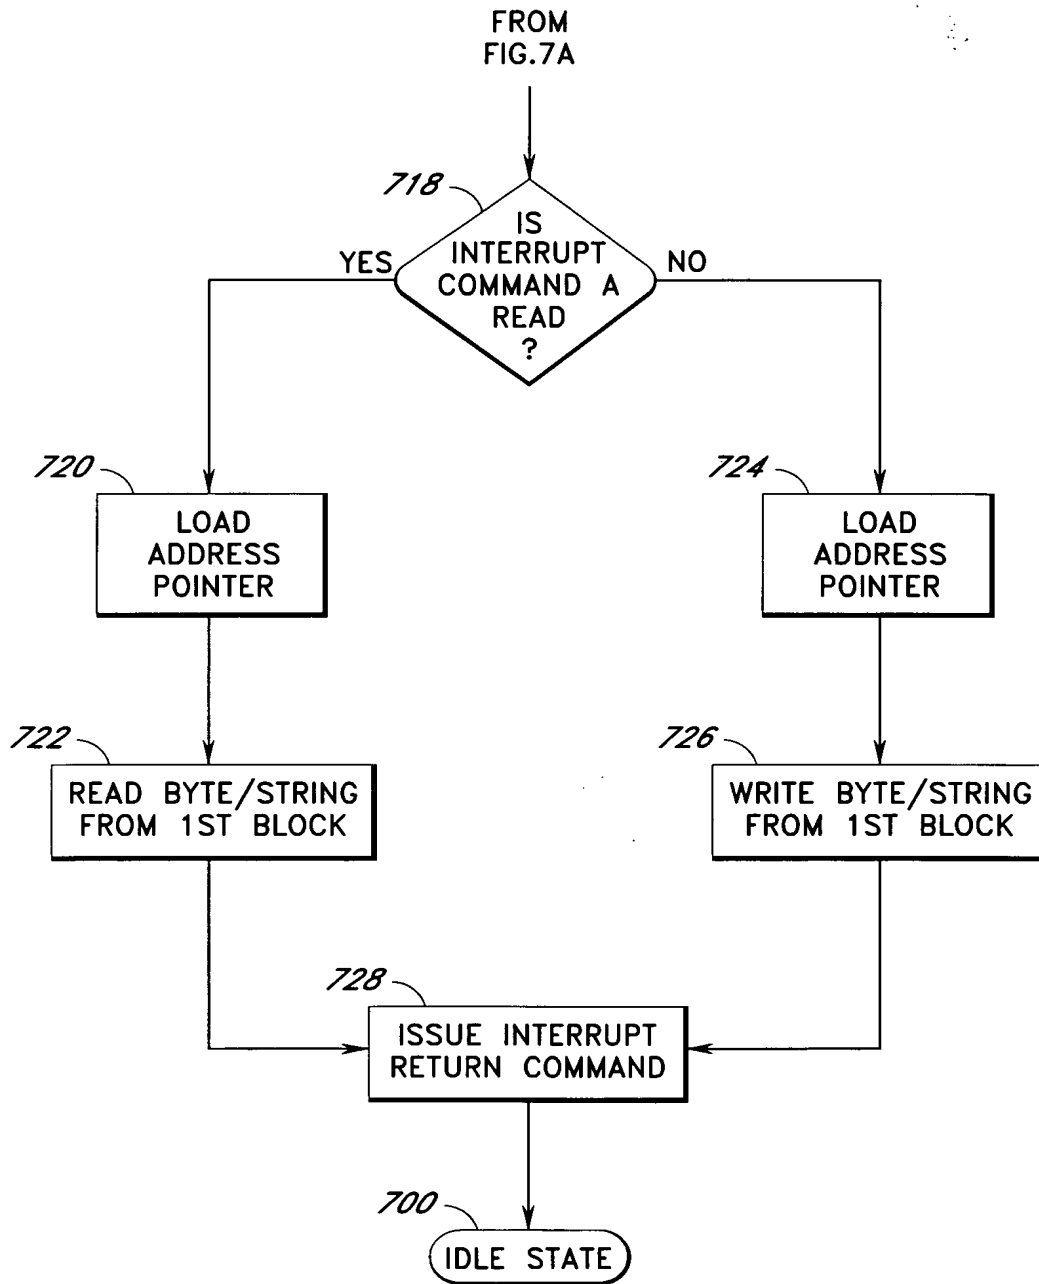


FIG. 7B

APPROVED	O.G. FIG.
BY	CLASS
DRAFTSMAN	SUBCL.
714	57

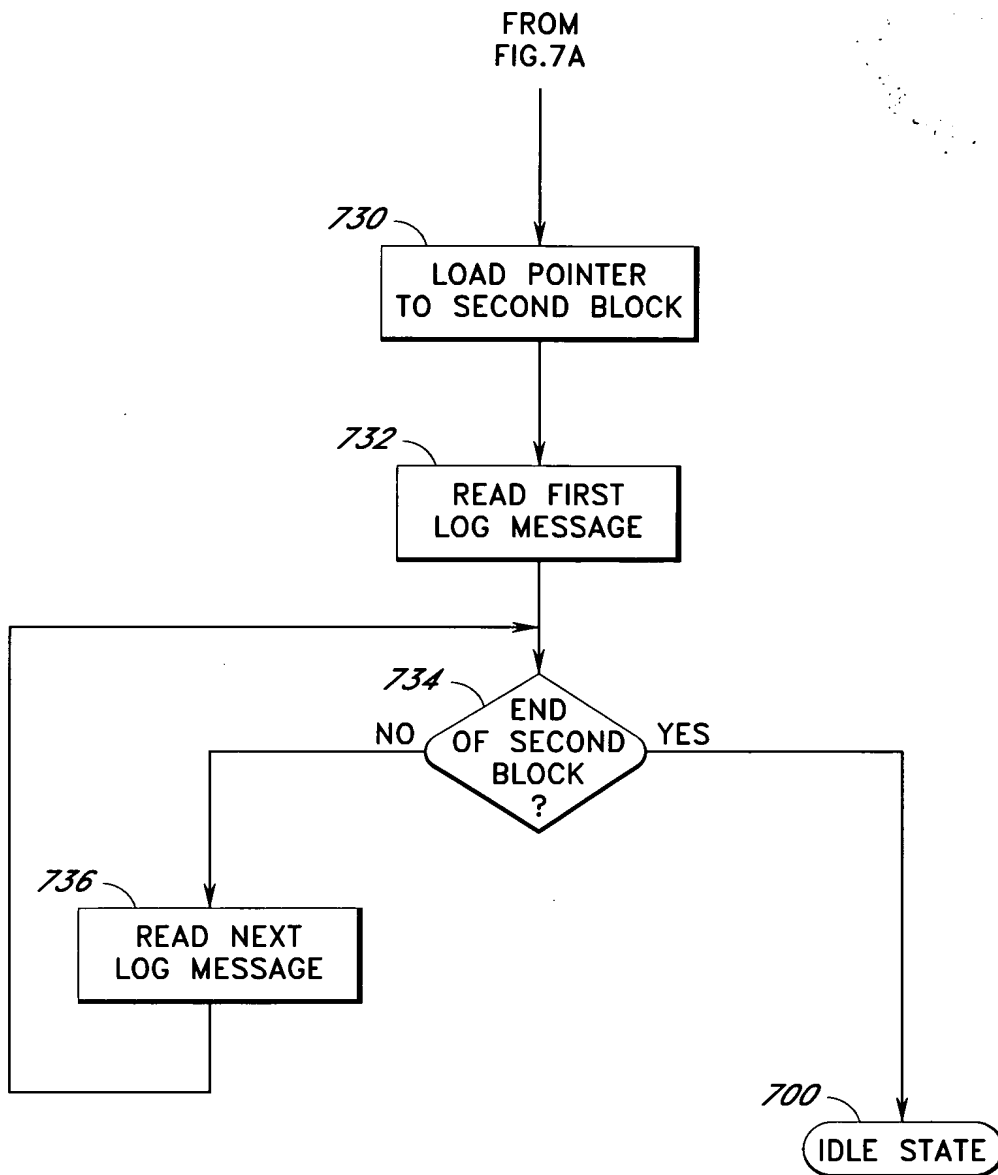


FIG. 7C

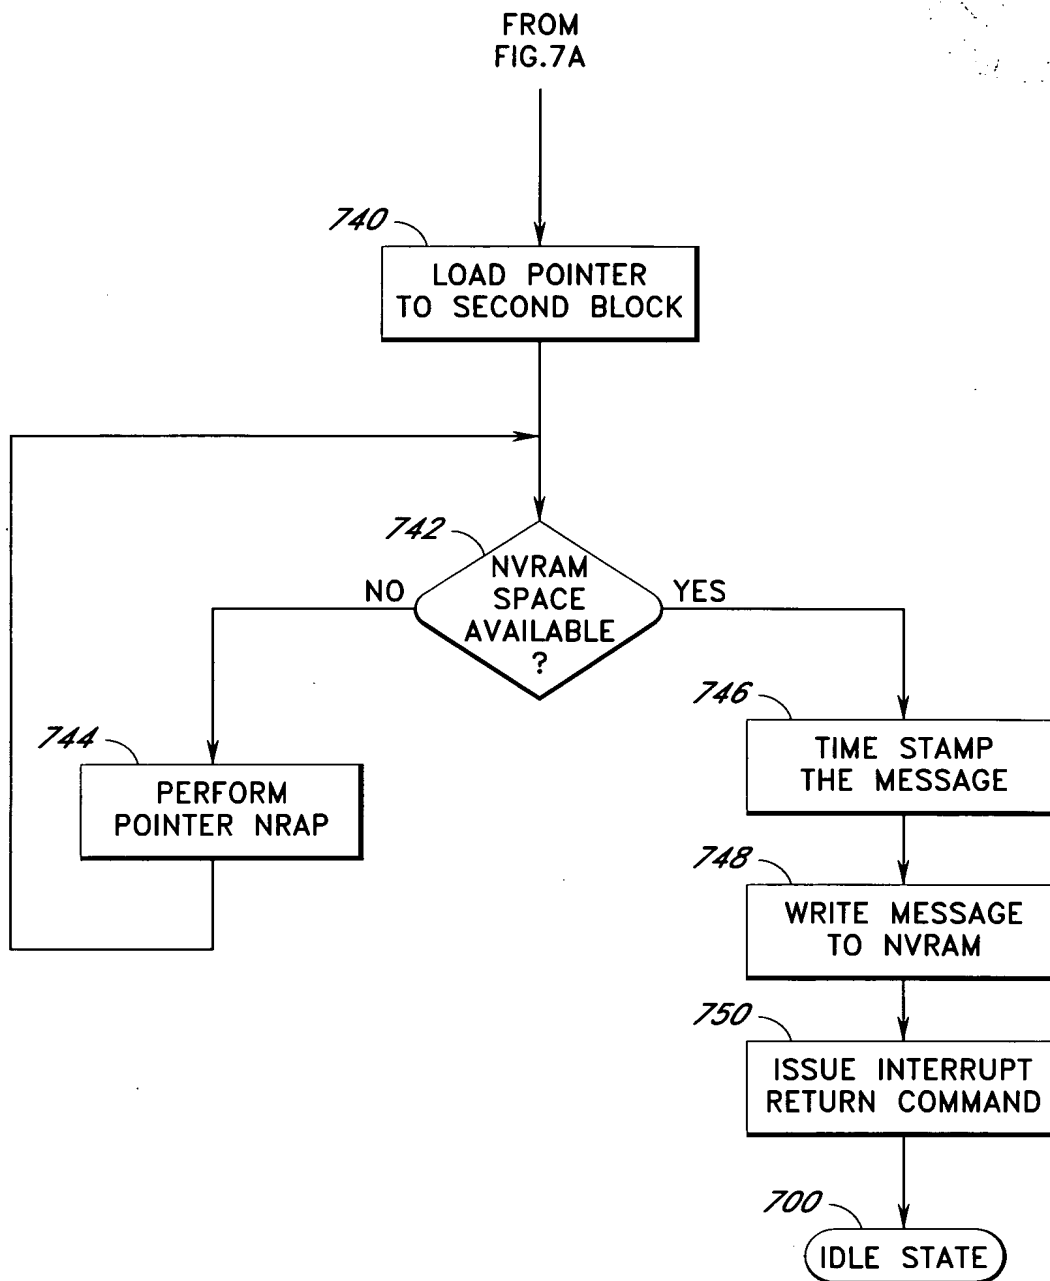


FIG. 7D

APPROVED	O.G. FIG.
BY	CLASS SUBCL
DRAFTSMAN	714 57

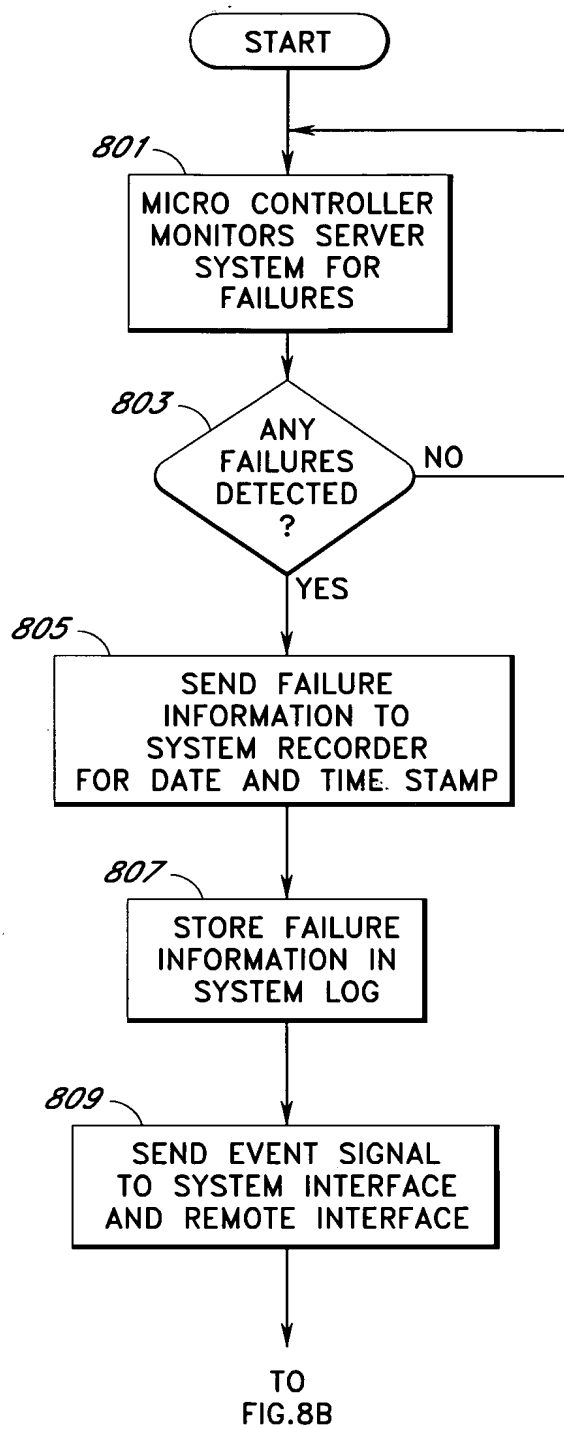


FIG. 8A

APPROVED	O.G. F/G.
BY	CLASS SUBCLASS
DRAFTSMAN	714 57

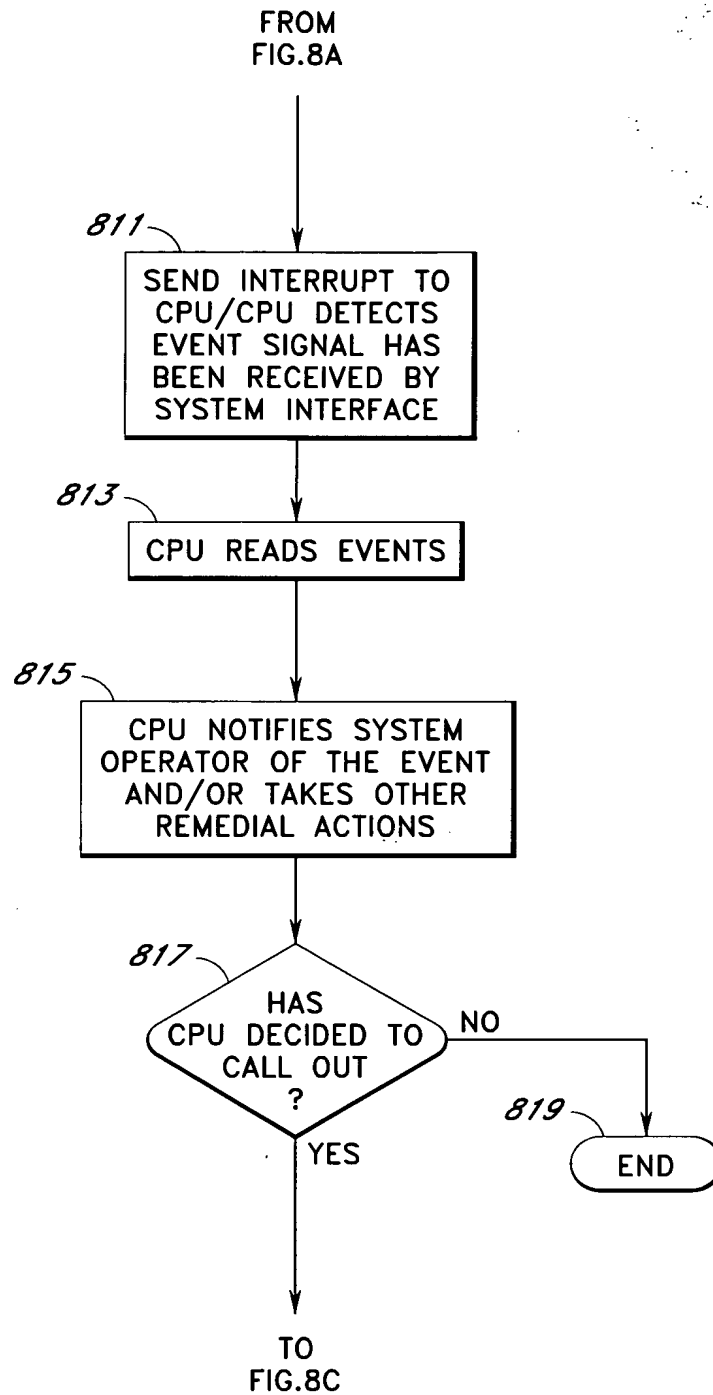


FIG.8B

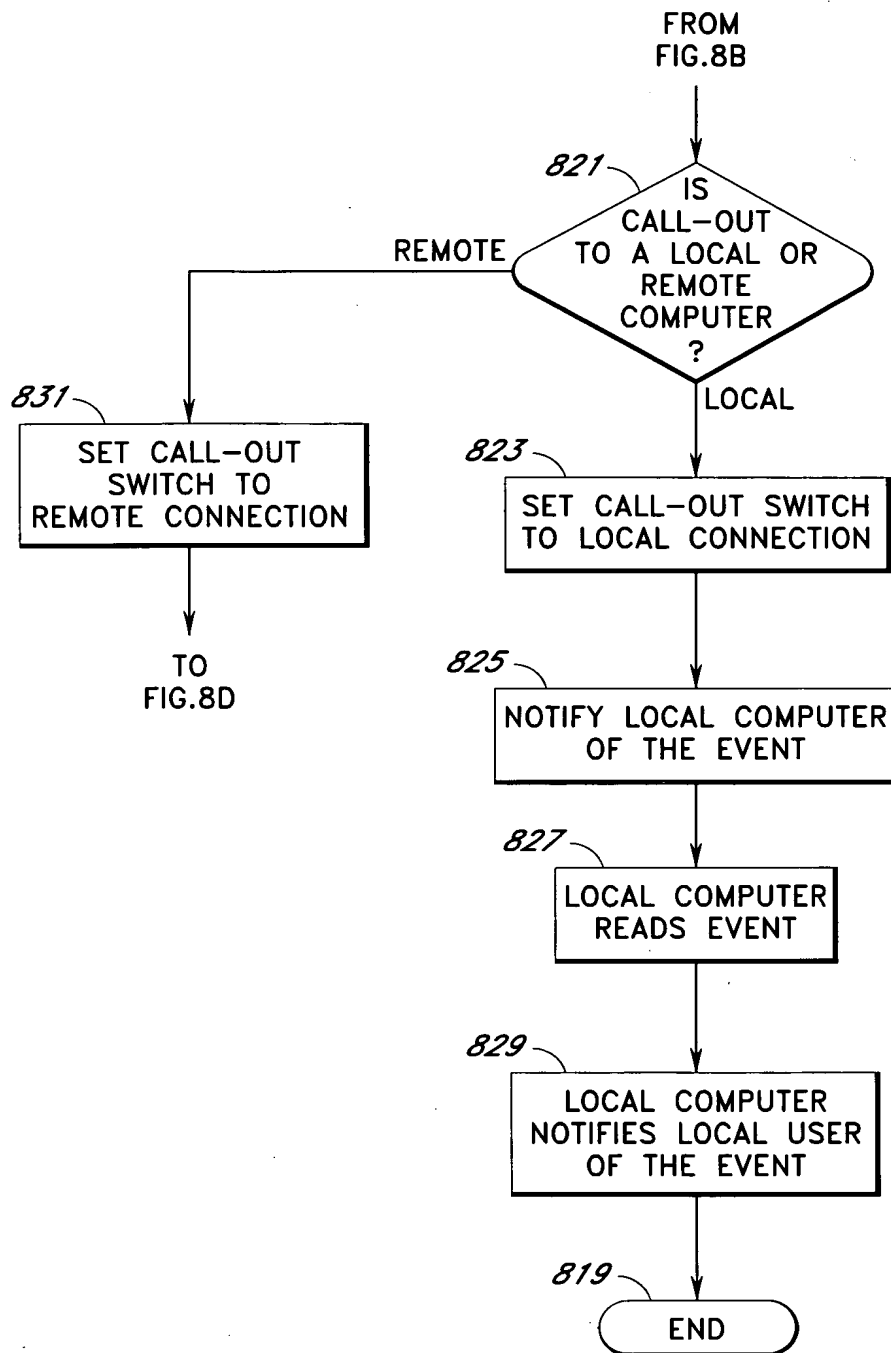


FIG.8C

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN	714	57

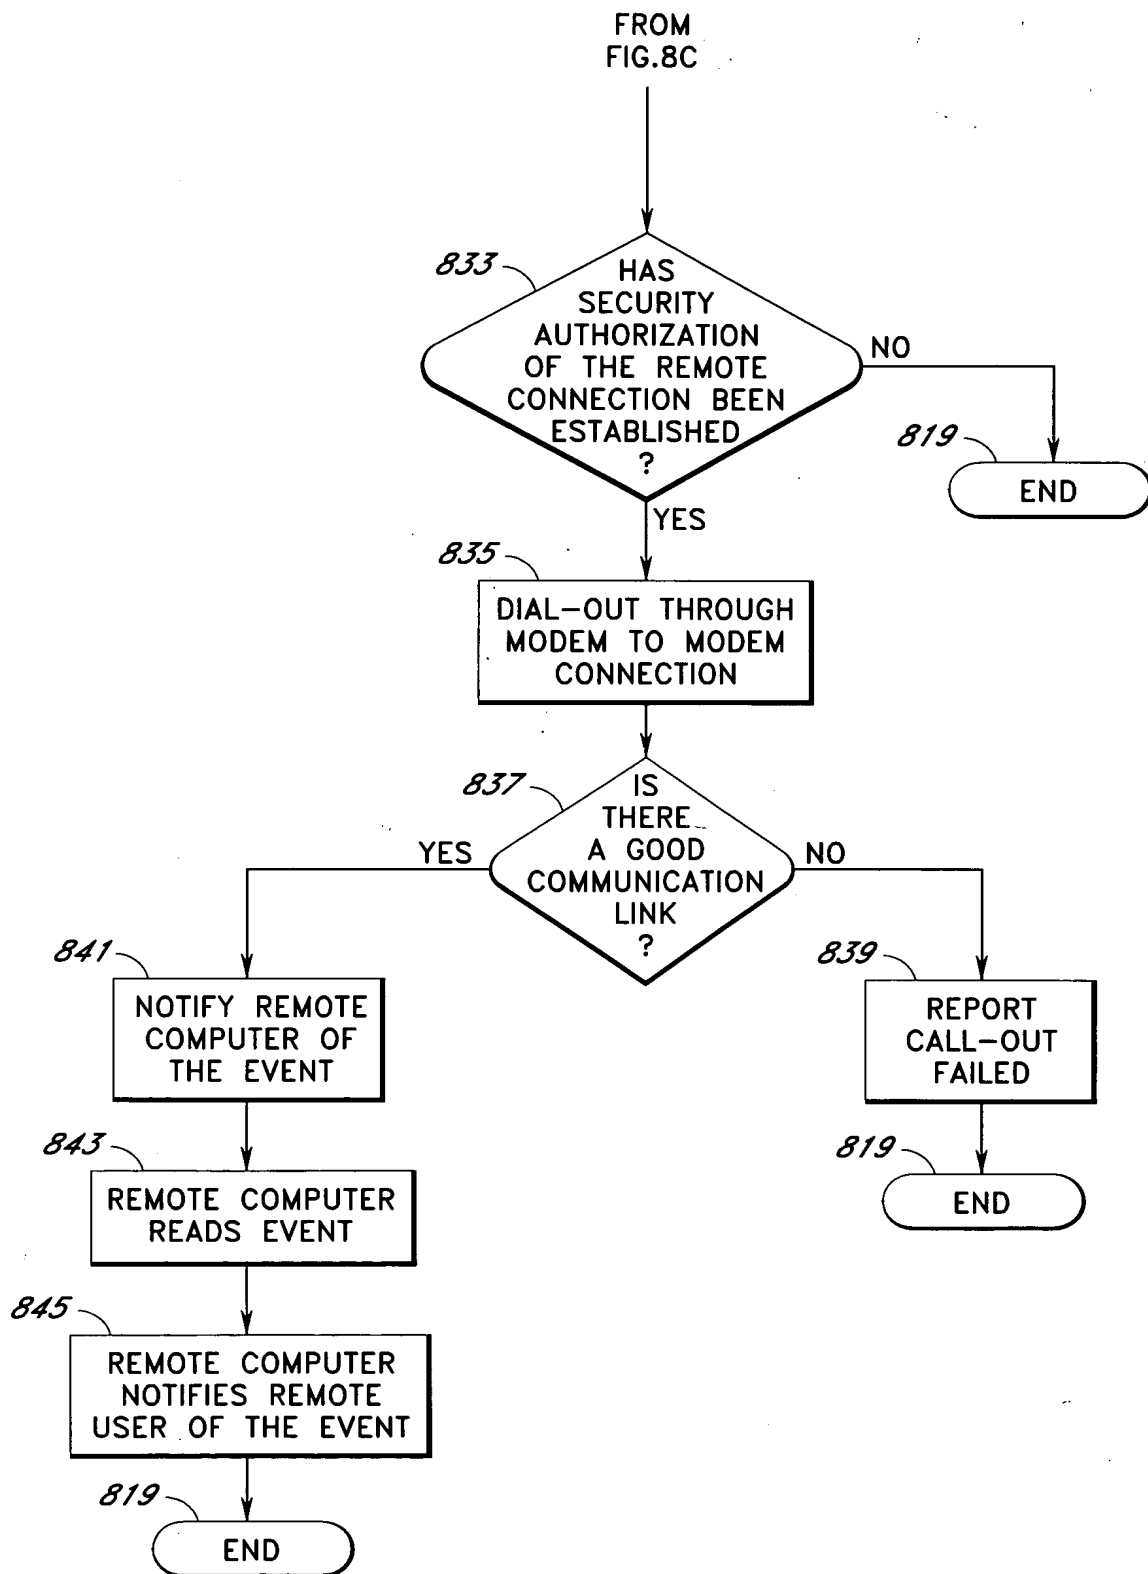


FIG. 8D